



LD300

Customer Display

2x20, Slim&Flat VFD
Easy-to-read, Plug and Play

Stand-alone model
with 1 pole.

**Flat
Screen
Design**



Attached to the
base without pole.

- All POS line display command mode supported. Included EPSON and Logic Control command.
- Power supply from 5V to 12V to prevent any mindless use of improper power input.
- Interface: USB / RS232 / Ethernet / Wi-Fi / Bluetooth
- Green / Blue Filter available
- OPOS/JPOS driver is standard.



Flat Screen fits Bezelless
System Perfectly.



Standard VESA 75x75 for rear
mounting (integrated) type.




LD300 Customer Display


Specification

General	Display Method	Vacuum Fluorescent Display (Blue-green)
	Number of characters	40 (20 columns x 2 lines)
	Brightness	500~1000 cd/m ²
	Character font	5 x 7 dot matrix
	Character type	95 Alphanumeric, 32 International Characters
	Character size	6.75(H) x 3.75(W) mm
	Dot Size (X x Y)	0.55 x 0.75 mm
	Download characters	9 characters
	Height	4.70" (120mm) with stand-alone base
		9.80" (250mm) with base and 1 extension
	Panel Dimension	145(W) x 45(H) x 22(D) mm
	Pole Dimension	130(H) x 33(Dia) mm for 1 pole, default package has 2 poles
	Base Dimension	182.5(W) x 74.8(H) x 100(D) mm
	Viewing Angle	Max. 90°
	Horizontal Rotation	Max. 355°
Weight	Approx. 980 grams	
Commands Mode	Ultimate, LD220, EPSON, AEDEX, UTC/S, UTC/P, ADM788, DSP800, CD5220, EMAX, LOGIC CONTROL	
Language Support	US English, Int'l English, Bosnia, Croatian, Czech, Danish, Dutch, Estonian, Faroese, Finnish, Flemish, French, Fr Canadian, German, Greek, Hebrew, Hungarian, Icelandic, Indonesian, Irish, Italian, Katakana, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Slovene, Slovak, Spanish, Swedish...	
Interface	USB / RS-232 (serial) / Ethernet / Wi-Fi / Bluetooth	
Connection	Baud rate	Direct connection 9600 or 19,200 bps
Reliability	MTBF	30,000 hours
Power	Consumption	5~12 VDC
Safety	EMC standards	FCC, CE
	Safety standards	

Integrated (Rear Mounting) available

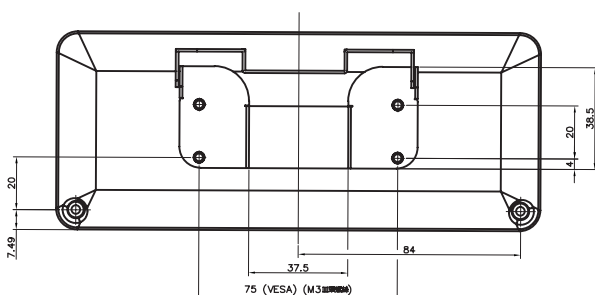

Panel Module Kit available

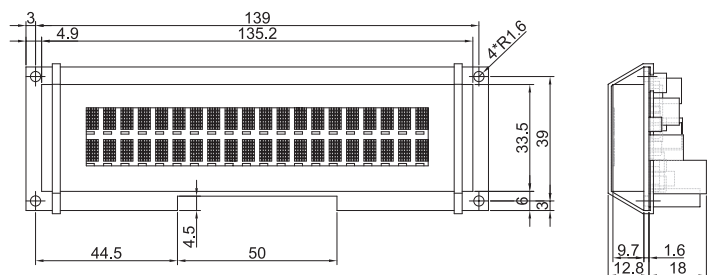

Note: Product Manufacturer reserves the right to modify specifications without notification of the contractual partner.



<http://www.labau.com.tw> E-Mail: service@labau.com.tw
 9F., No.531-1, Chung Cheng Rd., HsinTien, Taipei 231, Taiwan
 Tel: +886-2-2218-2277 Fax: +886-2-2218-5522