

# SD1000S

## 10" Flat Bezel-less LCD Display




## Sunlight Readable IPS LCD! (iPad 2)

Super Wide Viewing Angle and  
Outstanding Brightness.

- USB / VGA Interface Available
- Projective Capacitive Touch for optional
- High Resolution 1024x768
- IPS Panel with 300 Nits Brightness (iPad2 Panel)
- Ultra-Brightness Version (750 Nits) for optional.
- Super Wide Viewing Angle
- True Flat Design for Spill Proof and Anti-Dust
- Detachable Stand / VESA 75x75mm Available



SD1000S white housing  
in Pole Type

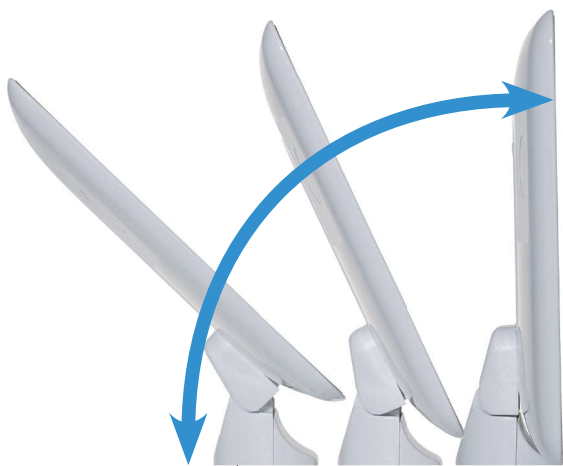

Super Slim Design with wide  
physical viewing angle.



Standard VES 75x75, can be  
mounted with POS System easil



# SD1000S LCD Display

## Specification

### Standard SD1000S Common Specification (applied on all interface)

Display Size	10" In-Plane Switching (IPS) TFT LCD Panel	
Interface	USB / VGA	
Resolution	1024x768	
Back light	LED	
Power	USB	5V USB × 2 / 5V USB + DC 5V Adapter
	DC Adapter	DC 12V Adapter (1500mA)
Power Consumption	5V / 1100mA	
	12V / 450 mA	
Display Area	196.6 (H) × 147.4 (V) mm	
White Luminance	300 cd/m <sup>2</sup> ~ 350 cd/m <sup>2</sup>	
Response Time	20 msec (Rising + Faling)	
Viewing Angle	178°(Horizontal)/178°(Vertical)	
Temperature	0°C~40°C (Operating)	
Physical Dimension	241.9 (L) x 375.6 (W) x 106 (D) mm	
EMC / Safety	FCC, CE	

### Touch Panel Specification

Touch Function	Projective Capacitive Multi Touch
Input Method	Finger
Interface	USB
Sensor Active Area	196.6 (H) x 147.74 (V) mm
Glass Type	Toughened Glass
Optical Characteristics	Transparency>85%



## SD1000S with ST-108 Base

New Display Solution!



<http://www.labau.com.tw> E-Mail: [service@labau.com.tw](mailto:service@labau.com.tw)  
9F., No.531-1, Chung Cheng Rd., HsinTien, Taipei 231, Taiwan  
Tel: +886-2-2218-2277 Fax: +886-2-2218-5522