

# SD800J

## 8" LCD MONITOR

True Flat  
4:3 Ratio

1024 x 768 Resolution  
800 x 600 Resolution




## OVERVIEW

- Interface: USB or VGA+HDMI dual signal input
- Pole type or solid stand or VESA 75\*75 mm mounting
- White or black chassis
- USB interface provides a single-cable solution combines power, video, and touch
- Rear I/O ports for easy access



VESA 75 x 75 mm

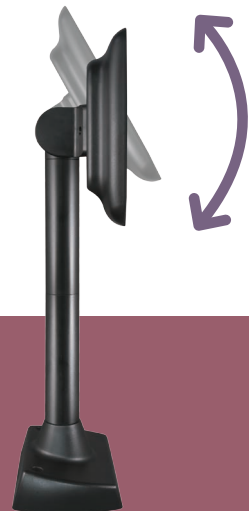

Tilt Adjustable


# SD800J 8" LCD MONITOR

## SPECIFICATION


	SD800JH		SD800JR	
Display Size	8 inch (4:3)			
Interface	USB B_Type	VGA + HDMI + DC	USB B_Type	VGA + HDMI + DC
Resolution	1024 x 768		800 x 600	
Power Source	5V USB + DC 12V Adapter	DC 12V Adapter (1500mA)	5V USB x 2	DC 12V Adapter (1500mA)
Power Consumption	12V / 400mA	12V / 350mA	5V / 750mA	12V / 350mA
Display Area	162.0(H) x 121.5(V) mm			
Display Type	TFT-LCD (Digital-Panel)			
Backlight	LED			
White Luminance	350 cd/m2		250 cd/m2	
Response Time	25 ms			
Viewing Angle	170° (Horizontal)/170° (Vertical)		140° (Horizontal)/120° (Vertical)	
Temperature	0° C~40° C (Operating)			
Physical Dimension	206.0(L) x 162.5(W) x 32.5(D) mm (Monitor Only)			
EMC / Safty Standards	FCC, CE			

### I/O TYPES

A. SD800JH



B. SD800JR



C. SD800JH & SD800JR

